



X Series Internal Combustion Forklift

with capacities of 20,000 to 35,000kg



ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.

Factory site: 666 Xiangfu Road,
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88926789 88132890

sales@hcforklift.com
www.hcforklift.com



HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

2022 VERSION ZACOPYRIGHT 2022/03

The World of Hangcha
SINCE 1956





Appearance

- / The exterior has a family appearance and a compact and smooth style showing modern industrial aesthetics.
- / With modular and standardized design taking full advantage of the X series platform, the main parts are verified step by step in advance, so that the vehicle is highly mature.
- / The key parts of renowned brands have been verified reliable and durable by the market for many years while being used by the old products.
- / Structural parts such as the frame, mast, etc. are upgraded and optimized on the basis of existing products, and are verified through CAE analysis and testing.

Efficient

- / With the hydraulic load-sensing system to enable on-demand supply, less continuous load of the engine and less energy consumption and emissions, the work efficiency is improved significantly, and the average operation efficiency is increased by more than 15%.

Intelligentized management system (option)

- / An optional cloud intelligent forklift management system FIMS and intelligent remote monitoring are provided to better facilitate equipment management and logistics management.



Reliable



ZF gearbox



Single double-acting transverse cylinder steering axle, full hydraulic power steering and load-sensing steering gear all can provides easy steering action.



Heavy-duty traction axle with two-stage deceleration; Maintenance-free wet brake; Hydraulic release spring action parking brake provides safe and reliable.



Maintenance

- / The high-definition LCD bus instruments have bus architecture and several built-in diagnosis and management functions to enable central fault alarm, simplified operations, easy diagnosis and flexible configuration of electrical functions.
- / The tiltable cab and wide-opened hood enable easy access to the oil and water, and make maintenance more convenient.



The newly designed LCD instrument has more comprehensive functions and more stable performance. It can display the important information such as truck status and engine faults... So that the operator can understand the truck status more intuitively and facilitate maintenance.



Battery compartment is easy to open for easy maintenance.



Comfort

- / The compact integral joystick enables easy and accurate remote control. The optimized hydraulic braking curve enables smooth easy-to-control braking.
- / The adjustable suspended seat, inclinable telescopic steering column, and multidirectional adjustable console can meet the needs of different operators to the greatest extent and bring a comfortable control experience.



Suspended seat with fingertip system that can be easily adjusted to suit each customer.

Safety



Excellent all round visibility is achieved by the overall design.



Optional imaging system with front and rear camera, increasing the safety greatly.



Standard Specification

- / Duplex wide-view mast
- / Hydraulic prong adjustment
- / Standard fork
- / Cabin
- / Cooling and heating air conditioner
- / Fully hydraulic power steering
- / Quadruple multi-way valve
- / Chair sensing system
- / Steering wheel adjusting device
- / Self-locking valve in the tilting fuel circuit
- / Speed limit valve in the lifting fuel circuit
- / Armrest's multi-directional adjustment device
- / Traction device
- / Main power switch
- / Reversing radar
- / LCD bus instrument
- / Neutral indicator
- / Parking braking indicator
- / Charge indicator
- / Preheating indicator
- / Engine oil pressure alarm
- / Air filter alarm
- / Accumulator low pressure alarm
- / Hydraulic oil filter alarm
- / Oil-water separator alarm
- / Engine failure alarm
- / Vehicle LED lights
- / Water thermometer
- / Oil gauge
- / Oil temperature meter
- / Engine hour counter
- / Pneumatic tire
- / Reverse buzzer
- / Snail horn
- / Manual tipping pump
- / High-position emission device
- / Mast LED operation light
- / Vehicle toolkit
- / Cab fan

Options

- / User specified color
- / Forks of other specifications
- / Masts of other specifications
- / Solid tire
- / Vehicle intercom
- / Reverse voice buzzer
- / Electronic alarm light (with\without a control switch)
- / Rear view system (optional with memory)
- / Front and rear view systems (optional with memory)
- / Spark arrester
- / Fire extinguisher (2kg \ 4kg)
- / Automatic fire extinguisher
- / Four-channel driving record system
- / Speed limit
- / Blue light
- / Weighing system
- / Air prefilter
- / Cab electric tipping pump

Fully-suspended all-round vision cab

- / The new fully-suspended all-round vision cab (HCCS) and optimized vehicle outline enable all-round sight and view.
- / The molded interior parts enable a more comfortable feel.
- / The integral frame constituted by profiled steel pipes has higher strength and better enclosure.





20-25t Mast Specification:(Pneumatic)


Type	Model	Max. fork height	Overall height		Tilt range
			Lowered	Extended	F/R
			mm	mm	(°)
Wide view mast	M330	3300	3550	5075	6/10
	M360	3600	3700	5450	6/10
	M400	4000	3900	5950	6/10
	M430	4300	4050	6325	6/10
	M450	4500	4150	6575	6/10
	M480	4800	4300	6950	6/10
	M500	5000	4450	7225	6/10
	M550	5500	4700	7850	3/6
	M600	6000	5000	8500	3/6
	M650	6500	5250	9125	3/6
M700	7000	5550	9775	3/6	

X Series 20-25t Internal Combustion Forklift Specification

Distinguishing mark	HANGCHA GROUP CO.,LTD.						
			CPCD200-XRW83G	CPCD250-XRW83G	CPCD200-XRH10G	CPCD250-XRH10G	
1.1	Manufacturer		HANGCHA GROUP CO.,LTD.				
1.2	Manufacturer's type designation		CPCD200-XRW83G	CPCD250-XRW83G	CPCD200-XRH10G	CPCD250-XRH10G	
1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Diesel	Diesel	Diesel	Diesel	
1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Seated	Seated	Seated	Seated	
1.5	Rated capacity/rated load	Q (kg)	20000	25000	20000	25000	
1.6	Load centre distance	c (mm)	1200	1200	1200	1200	
1.8	Load distance, centre of drive axle to fork	x (mm)	1100	1100	1100	1100	
1.9	Wheelbase	y (mm)	4250	4250	4250	4250	
Weight	2.1	Service Weight	kg	33500	35500	33500	35500
Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		Pneumatic	Pneumatic	Pneumatic	Pneumatic
	3.2	Tyre size, front		14.00-24-24PR	14.00-24-28PR	14.00-24-24PR	14.00-24-28PR
	3.3	Tyre size, rear		14.00-24-24PR	14.00-24-28PR	14.00-24-24PR	14.00-24-28PR
	3.5	Wheels, number front / rear (x = driven wheels)		4×/2	4×/2	4×/2	4×/2
	3.6	Tread, front	b ₁₀ (mm)	2200	2200	2200	2200
	3.7	Tread, rear	b ₁₁ (mm)	2300	2300	2300	2300
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β(°)	6/10	6/10	6/10	6/10
	4.2	Height, mast lowered	h ₁ (mm)	3900	3900	3900	3900
	4.3	Free lift	h ₂ (mm)	110	110	110	110
	4.4	Lift	h ₃ (mm)	4000	4000	4000	4000
	4.5	Height, mast extended	h ₄ (mm)	5950	5950	5950	5950
	4.7	Height of overhead cabin	h ₆ (mm)	3580	3580	3580	3580
	4.8	Seat height relating to SIP	h ₇ (mm)	2250	2250	2250	2250
	4.12	Coupling height	h ₁₀ (mm)	720	720	720	720
	4.19	Overall length	l ₁ (mm)	8690	8690	8690	8690
	4.20	Length to face of forks	l ₂ (mm)	6250	6250	6250	6250
	4.21	Overall width	b ₁ /b ₂ (mm)	3050/2750	3050/2750	3050/2750	3050/2750
	4.22	Fork dimensions	s/e/l (mm)	110×250×2400	110×250×2400	110×250×2400	110×250×2400
	4.24	Fork-carriage width	b ₃ (mm)	3000	3000	3000	3000
	4.25	Distance between fork-arms	b ₅ (mm)	900/2600	900/2600	900/2600	900/2600
	4.31	Ground clearance, laden, below mast	m ₁ (mm)	300	300	300	300
	4.32	Ground clearance, centre of wheelbase	m ₂ (mm)	400	400	400	400
	4.34.1	Aisle width with load length 1800mm	A _{st} (mm)	9540	9540	9540	9540
4.34.2	Aisle width with load length 2400mm	A _{st} (mm)	9540	9540	9540	9540	
4.35	Turning radius	W _a (mm)	5800	5800	5800	5800	
4.36	Minimum pivoting point distance	b ₁₃ (mm)	2080	2080	2080	2080	
Performance data	5.1	Travel speed, laden/unladen	km/h	27/31	26/30	27/31	26/30
	5.2	Lift speed, laden/unladen	m/s	0.35/0.38	0.34/0.36	0.35/0.38	0.34/0.36
	5.3	Lowering speed, laden/unladen	m/s	0.45/0.41	0.45/0.41	0.45/0.41	0.45/0.41
	5.5	Drawbar pull, laden/unladen	N	160000/-	160000/-	160000/-	160000/-
	5.7	Gradeability, laden/unladen	%	25/-	25/-	25/-	25/-
	5.10	Service brake		Wet disc brake	Wet disc brake	Wet disc brake	Wet disc brake
	Parking brake		spring applied, hydraulic release multi-disc brake				
Combustion-engine	7.1	Engine manufacturer/type		VOLVO TAD851VE	VOLVO TAD851VE	VOLVO TAD881VE	VOLVO TAD881VE
	7.2	Engine power	kW	185	185	185	185
	7.3	Rated speed	r/min	2200	2200	2210	2210
	7.4	Number of cylinders/displacement	(-)/(cm³)	6/7700	6/7700	6/7700	6/7700
		Emission Std.		Stage 3A/Tier 3	Stage 3A/Tier 3	Stage V	Stage V
	7.9	Vehicle electrical system voltage	V	24	24	24	24
	7.10	Battery voltage/nominal capacity	V/Ah	2×12/150	2×12/150	2×12/150	2×12/150
		Rated torque	N·m/r/min	1160/1350	1160/1350	1150/1400	1150/1400
		Transmissions Manufacturer		ZF	ZF	ZF	ZF
		Transmissions Type		3WG 211	3WG 211	3WG 211	3WG 211
	Stage FWD/RVS		3/3	3/3	3/3	3/3	
Addition data	10.1	Operating pressure for attachments	bar	230	230	230	230
	10.2	Oil volume for attachments	l/min	300	300	300	300
	10.3	Hydraulic Tank - capacity (drain & refill)	liter	420	420	420	420
	10.4	Fuel tank capacity	liter	420	420	420	420
	10.7	Sound pressure level at the driver's seat	dB (A)	76	76	76	76

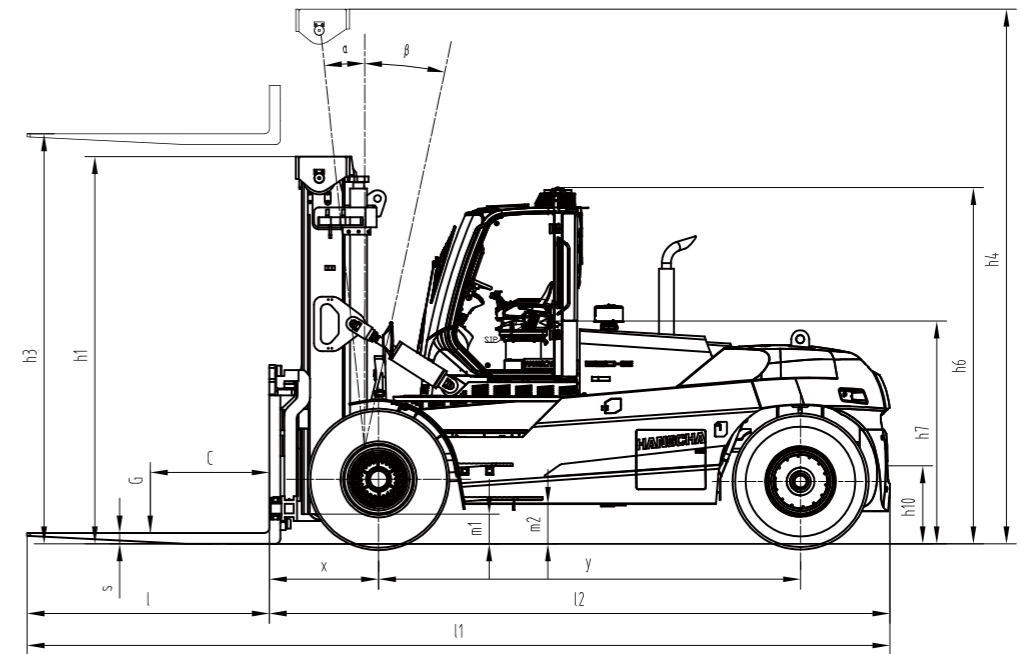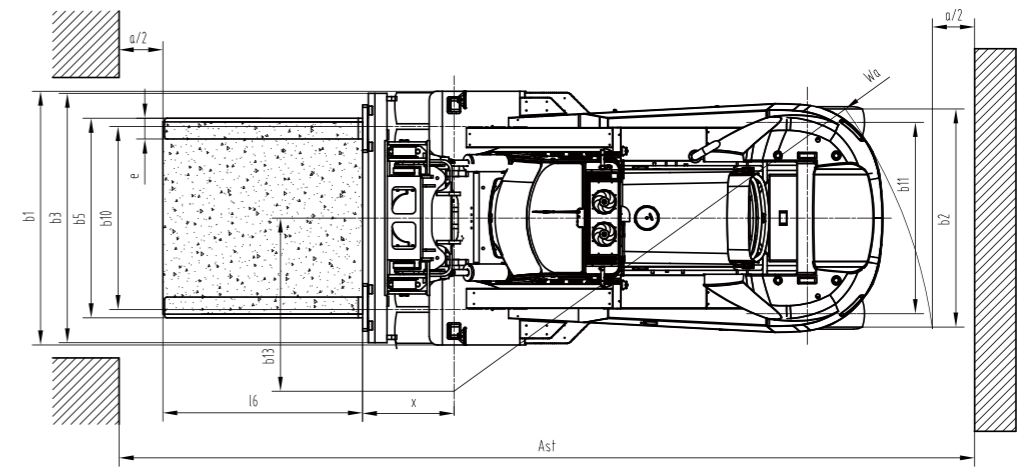

Capacity kg

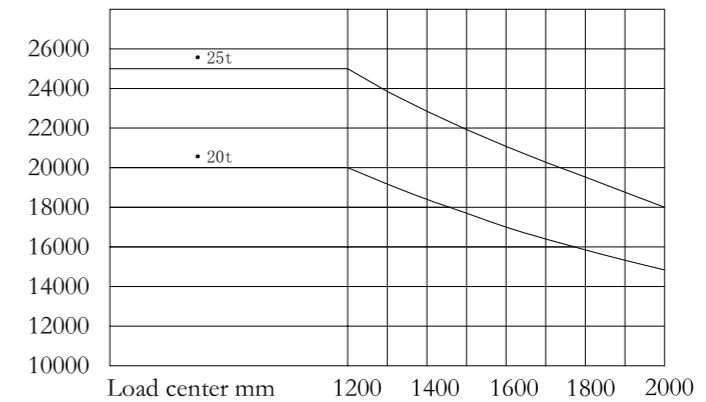

X Series 28-35t Internal Combustion Forklift Specification

		HANGCHA GROUP CO.,LTD.									
Distinguishing mark	1.1	Manufacturer									
	1.2	Manufacturer's type designation	CPCD280-XRW83G	CPCD300-XRW83G	CPCD320-XRW83G	CPCD350-XRW83G	CPCD280-XRH10G	CPCD300-XRH10G	CPCD320-XRH10G	CPCD350-XRH10G	
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker	Seated	Seated	Seated	Seated	Seated	Seated	Seated	Seated	
	1.5	Rated capacity/ rated load	28000	30000	32000	30000	32000	30000	32000	35000	
	1.6	Load centre distance	c (mm)	1200	1200	1200	1200	1200	1200	1200	
	1.8	Load distance, centre of drive axle to fork	x (mm)	1160	1160	1160	1180	1160	1160	1180	
	1.9	Wheelbase	y (mm)	4750	4750	4750	4750	4750	4750	4750	
	Weight	2.1	Service Weight	kg	40000	42000	43600	46500	40000	42000	43600
Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	
	3.2	Tyre size, front	16.00-24-32PR	16.00-24-32PR	16.00-24-32PR	16.00-25-36PR	16.00-24-32PR	16.00-24-32PR	16.00-24-32PR	16.00-25-36PR	
	3.3	Tyre size, rear	16.00-24-32PR	16.00-24-32PR	16.00-24-32PR	16.00-25-36PR	16.00-24-32PR	16.00-24-32PR	16.00-24-32PR	16.00-25-36PR	
	3.5	Wheels, number front / rear (x = driven wheels)	4×2	4×2	4×2	4×2	4×2	4×2	4×2	4×2	
	3.6	Tread, front	b10 (mm)	2460	2460	2460	2460	2460	2460	2460	
	3.7	Tread, rear	b11 (mm)	2440	2440	2440	2440	2440	2440	2440	
	Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β(°)	6/10	6/10	6/10	6/10	6/10	6/10	6/10
4.2		Height, mast lowered	h1 (mm)	4100	4100	4100	4350	4100	4100	4350	
4.3		Free lift	h2 (mm)	110	110	110	125	110	110	125	
4.4		Lift	h3 (mm)	4000	4000	4000	4000	4000	4000	4000	
4.5		Height, mast extended	h4 (mm)	6090	6090	6090	6340	6090	6090	6340	
4.7		Height of overhead cabin	h5 (mm)	3710	3710	3710	3710	3710	3710	3710	
4.8		Seat height relating to SIP	h7 (mm)	2430	2430	2430	2430	2430	2430	2430	
4.12		Coupling height	h10 (mm)	760	760	760	760	760	760	760	
4.19		Overall length	l1 (mm)	9350	9350	9350	9370	9350	9350	9370	
4.20		Length to face of forks	l2 (mm)	6910	6910	6910	6930	6910	6910	6930	
4.21		Overall width	b1/b2(mm)	3420/2960	3420/2960	3420/2960	3420/2960	3420/2960	3420/2960	3420/2960	3420/2960
4.22		Fork dimensions	s/e/l (mm)	110×300×2440	110×300×2440	110×300×2440	125×300×2440	110×300×2440	110×300×2440	110×300×2440	125×300×2440
4.24		Fork carriage width	b3 (mm)	3300	3300	3300	3300	3300	3300	3300	
4.25		Distance between fork-arms	b5 (mm)	1000/3000	1000/3000	1000/3000	1000/3000	1000/3000	1000/3000	1000/3000	
4.31		Ground clearance, laden, below mast	m1 (mm)	300	300	300	300	300	300	300	
4.32		Ground clearance, centre of wheelbase	m2 (mm)	450	450	450	450	450	450	450	
4.34.1		Aisle width with load length 1800mm	Aa1 (mm)	10400	10400	10400	10400	10400	10400	10400	
4.34.2		Aisle width with load length 2400mm	Aa2 (mm)	10400	10400	10400	10400	10400	10400	10400	
4.35		Turning radius	Wa (mm)	6600	6600	6600	6600	6600	6600	6600	
4.36		Minimum pivoting point distance	b13 (mm)	2600	2600	2600	2600	2600	2600	2600	
Performance data	5.1	Travel speed, laden/unladen	km/h	22/25	22/25	22/25	22/25	22/25	22/25	22/25	
	5.2	Lift speed, laden/unladen	m/s	0.30/0.35	0.27/0.34	0.26/0.33	0.25/0.32	0.30/0.35	0.27/0.34	0.26/0.33	0.25/0.32
	5.3	Lowering speed, laden/unladen	m/s	0.45/0.45	0.45/0.45	0.45/0.45	0.45/0.45	0.45/0.45	0.45/0.45	0.45/0.45	
	5.5	Drawbar pull, laden/unladen	N	240000/-	240000/-	240000/-	240000/-	240000/-	240000/-	240000/-	
	5.7	Gradeability, laden/unladen	%	20/-	20/-	20/-	20/-	20/-	20/-	20/-	
	5.10	Service brake		Wet disc brake	Wet disc brake	Wet disc brake	Wet disc brake	Wet disc brake	Wet disc brake	Wet disc brake	
		Parking brake		spring applied, hydraulic release multi-disc brake	spring applied, hydraulic release multi-disc brake	spring applied, hydraulic release multi-disc brake	spring applied, hydraulic release multi-disc brake	spring applied, hydraulic release multi-disc brake	spring applied, hydraulic release multi-disc brake	spring applied, hydraulic release multi-disc brake	
Combustion-engine	7.1	Engine manufacturer/type	VOLVO TAD851VE	VOLVO TAD851VE	VOLVO TAD851VE	VOLVO TAD851VE	VOLVO TAD881VE	VOLVO TAD881VE	VOLVO TAD881VE	VOLVO TAD881VE	
	7.2	Engine power	kW	185	185	185	185	185	185	185	
	7.3	Rated speed	r/min	2200	2200	2200	2200	2210	2210	2210	
	7.4	Number of cylinders/displacement	(-)/cm³	6/7700	6/7700	6/7700	6/7700	6/7700	6/7700	6/7700	
		Emission Std.		Stage 3A/Tier 3	Stage 3A/Tier 3	Stage 3A/Tier 3	Stage 3A/Tier 3	Stage V	Stage V	Stage V	
	7.9	Vehicle electrical system voltage	V	24	24	24	24	24	24	24	
	7.10	Battery voltage/nominal capacity	V/Ah	2×12/150	2×12/150	2×12/150	2×12/150	2×12/150	2×12/150	2×12/150	
		Rated torque	Nm/r/min	1160/1350	1160/1350	1160/1350	1160/1350	1150/1400	1150/1400	1150/1400	
		Transmissions Manufacturer		ZF	ZF	ZF	ZF	ZF	ZF	ZF	
		Transmissions Type		3WG 211	3WG 211	3WG 211	3WG 211	3WG 211	3WG 211	3WG 211	
	Stage FWD/RVS		3/3	3/3	3/3	3/3	3/3	3/3	3/3		
Addition data	10.1	Operating pressure for attachments	bar	235	235	235	235	235	235	235	
	10.2	Oil volume for attachments	l/min	340	340	340	340	340	340	340	
	10.3	Hydraulic Tank - capacity (drain & refill)	liter	500	500	500	500	500	500	500	
	10.4	Fuel tank capacity	liter	500	500	500	500	500	500	500	
	10.7	Sound pressure level at the driver's seat	dB (A)	75	75	75	75	75	75	75	

28-32t Mast Specification:(Pneumatic)

Type	Model	Max. fork height	Overall height		Tilt range
			Lowered	Extended	F/R
Wide view mast		mm	mm	mm	(°)
	M360	3600	3900	5690	6/10
	M400	4000	4100	6090	6/10
	M430	4300	4250	6390	6/10
	M450	4500	4350	6590	6/10
	M480	4800	4500	6890	6/10
	M500	5000	4650	7140	6/10
	M550	5500	4900	7640	3/6
	M600	6000	5200	8190	3/6
	M650	6500	5450	8690	3/6
M700	7000	5750	9240	3/6	

35t Mast Specification:(Pneumatic)

Type	Model	Max. fork height	Overall height		Tilt range
			Lowered	Extended	F/R
Wide view mast		mm	mm	mm	(°)
	M360	3600	4150	5940	6/10
	M400	4000	4350	6340	6/10
	M430	4300	4500	6640	6/10
	M450	4500	4600	6840	6/10
	M480	4800	4750	7140	6/10
	M500	5000	4900	7390	6/10
	M550	5500	5150	7890	3/6
	M600	6000	5450	8440	3/6
	M650	6500	5700	8940	3/6
M700	7000	6000	9490	3/6	

